


TRIGANO

TRIGANO JARDIN


Le Boulay
41170 – Cormenon, France

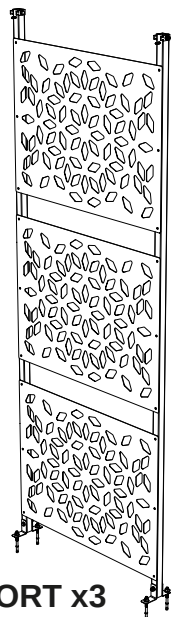

x3

J-87906


CLAUSTRA CARPORT x3

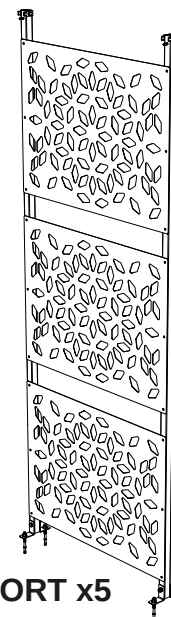

x5


J-87907

CLAUSTRA CARPORT x5

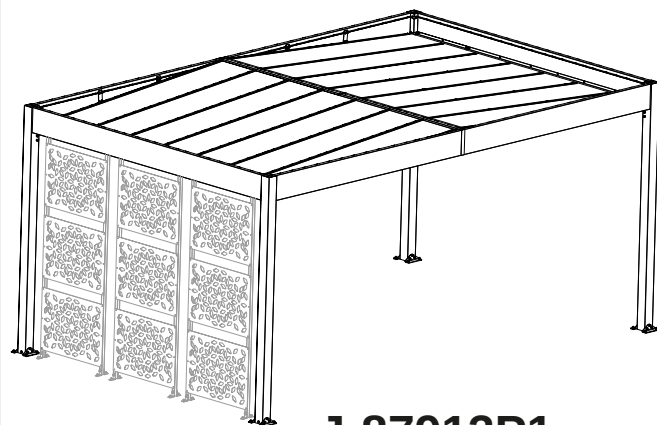


J-87913P1

LIBECCIO 3

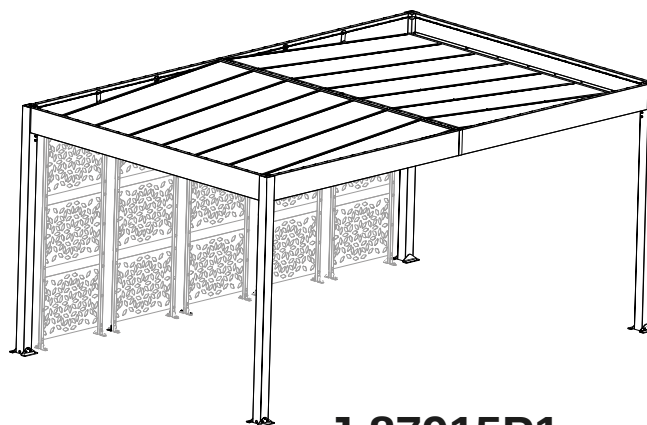

J-87915P1

LIBECCIO 5

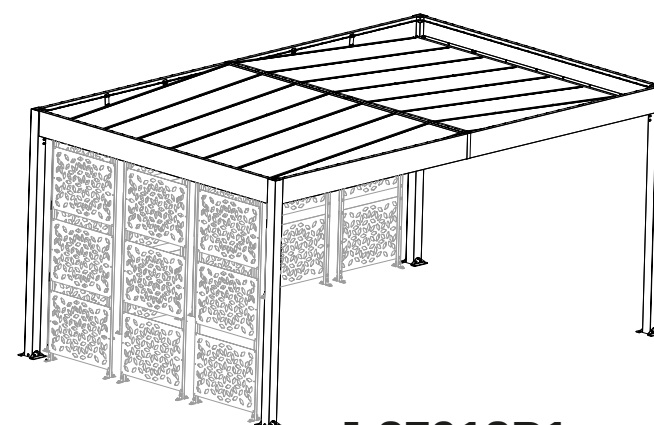

J-87918P1

LIBECCIO 8



90 km/h



20 cm

J-123193A

Madame, Monsieur,

Nous tenons à vous féliciter et à vous remercier pour l'acquisition de produit conçu et réalisé par TRIGANO JARDIN.

Pour qu'il soit utilisé dans les meilleures conditions possibles de sécurité, nous vous demandons d'accorder toute votre attention aux différents conseils ci-dessous et de vous reporter aux figures correspondantes qui se situent dans les pages suivantes.

Conservez soigneusement cette notice de montage qui pourrait vous être utile dans l'avenir.

Avec nos remerciements et nos sentiments dévoués.

La Société TRIGANO JARDIN

Michel ESNAULT - Directeur Général.

IMPORTANT

- Veuillez lire attentivement les instructions avant de procéder à l'assemblage de votre produit.
- Veuillez suivre attentivement et dans l'ordre les différentes étapes.
- Conservez les instructions pendant la durée de vie du produit.
- Trier les pièces et vérifier la liste du contenu avant d'entreprendre le montage.
- Il ne faut pas mettre les panneaux claustra sur deux côtés parallèles.
- Les produits « J-87906 » et « J-87907 » ont été conçus et produits pour être utilisés exclusivement avec le produit « J-87905P1 ».
- L'utilisation des produits « J-87906 » et « J-87907 » réduit la résistance maximale au vent supportée par le produit « J-87905P1 » à 90 km/h.
- Résistance maximale à la neige des produits « J-87913P1 », « J-87915P1 » et « J-87918P1 » : 20 cm.
- Résistance maximale au vent des produits « J-87913P1 », « J-87915P1 » et « J-87918P1 » : 90 km/h.

SECURITE

- N'essayez pas d'assembler le produit dans des conditions venteuses ou pluvieuses.
- Tenez tous les sacs plastiques hors de portée des enfants.
- Eloignez les enfants de la zone d'assemblage.
- Evitez d'assembler le produit si vous êtes fatigué, sous traitement médicamenteux ou sous l'emprise d'alcool ou souffrez d'étourdissements.
- Si vous utilisez une échelle ou des outils électriques, veuillez suivre les conseils de sécurité du fabricant.
- Quelques pièces ont des bords agressifs. Faites attention lors de la manipulation, portez toujours des gants lors de l'assemblage.
- Le produit doit être scellé dans du béton selon les règles de l'art.
- Resserrez toutes les vis en fin de montage.

INSTALLATION

- Veuillez consulter les autorités locales pour vérifier si des permis sont requis pour installer le produit.
- Cet article doit être soigneusement installé sur un terrain plat et horizontal sous peine de déséquilibre.
- L'ancrage du produit au sol est obligatoire pour assurer la stabilité et la rigidité du produit, ainsi que d'assurer la garantie.
- Ce produit devra être assemblé sur une base solide (comme du béton ou de l'asphalte).
- Pendant l'assemblage, utilisez des éléments souples comme le carton d'emballage sous les pièces afin d'éviter les rayures et endommagements.
- **Etape 3** : Pour monter les panneaux « J-150975 », il faut enlever les capuchons de protection.
- **Etape 3** : Ne pas serrer fort (6 Nm max).
- **Etape 5** : Pour fixer le produit au sol:
 - Percer des trous de Ø8 dans le béton à l'emplacement des trous des pieds de fixation du produit;
 - Enfoncer avec un marteau les goujons d'ancrage « J-121374 » dans les trous;
 - Visser les goujons d'ancrage.
- Répéter les étapes 1 à 7 pour le nombre de panneau que vous vouliez monter.

MAINTENANCE

- Nettoyer votre produit à l'eau claire ou avec des produits au PH neutre.
- Couleur de peinture RAL : 7016.
- Vérifiez régulièrement le serrage des vis du produit.

SAV

- Le service après vente remplace uniquement les pièces manquantes et/ou défectueuses et en aucun cas la totalité de l'article.
- Les pièces éventuellement manquantes dans le colis initial sont fournies gratuitement sous réserve que la réclamation soit faite dans les deux mois suivant l'achat du produit.
- Les demandes d'indemnisation (quelle qu'en soit la forme) ne sont pas admises.
- Il ne sera admis aucun retour de marchandise, sauf accord et demande spécifique de notre part.
- Tout produit défectueux devra être tenu à disposition pendant 1 mois, celui-ci pourra faire l'objet d'une reprise pour expertise par nos soins.
- Il n'est pas possible de modifier le produit d'origine. Seules, les pièces de rechange TRIGANO JARDIN doivent être utilisées. Pour toute demande de SAV, veuillez-vous connecter à l'adresse suivante : <http://sav.triganojardin.com>.

GARANTIE

Pour bénéficier de votre garantie, veuillez conserver cette notice ainsi qu'une preuve d'achat.

En cas de problème sur votre produit, rendez-vous sur notre site internet <http://sav.triganojardin.com>.

1. Conditions:

- La garantie couvre un défaut de fabrication ou un non fonctionnement du produit dans le cadre de son utilisation normale.
- Les garanties ne seront valides que si le produit est installé, utilisé et entretenu conformément aux instructions présentes dans la notice.
- Toute mauvaise manipulation et toute modification du produit non prévues dans la notice annulent toutes les garanties.
- Les garanties ne couvrent pas les dommages causés par des intempéries (tempête, grêle, inondation...) ou tout autre cas de force majeure (incendie, vandalisme...).

2. Exclusions

- Mauvais montage, installation, utilisation et / ou défaut d'entretien.
- Trous, micro perforations ou déchirures accidentelles consécutifs au montage ou à l'utilisation.
- Non respect des recommandations et consignes indiquées sur la notice de montage et sur la lettre de recommandations.
- Non respect des consignes de scellement du produit avant utilisation.
- Modifications sur produits ainsi que les détériorations dues aux intempéries (pluie, neige, grêle, vent).

3. Durée:

- Les pièces en acier sont garanties 2 ans.



Dear Customer,

Congratulations on your purchase! We would like to thank you for choosing the Carport Mistral, designed and manufactured by TRIGANO JARDIN.

To ensure that this product is used in the safest possible conditions, we recommend that you pay careful attention to the guidelines below and that you refer to the diagrams on the following pages.

Please keep these assembly instructions in a safe place for future reference.

Sincere thanks and best regards.

TRIGANO JARDIN,

Michel ESNAULT - Chief Executive Officer.

IMPORTANT

- Please read these instructions carefully before starting to assemble the product.
- Please carry out the steps carefully and in the order set out in these instructions.
- Please keep these instructions in a safe place throughout the lifespan of the product.
- Sort the parts and check them against the list of contents before assembling.
- The claustra's panels must not be placed on two parallel sides.
- The "J-87906" and "J-87907" products were designed and produced for use exclusively with the "J-87905P1" product.
- The use of products "J-87906" and "J-87907" reduces the maximum wind resistance supported by the "J-87905P1" product to 90 km/h.
- Maximum snow resistance of the products "J-87913P1", "J-87915P1" and "J-87918P1": 20 cm.
- Maximum wind resistance of the products "J-87913P1", "J-87915P1" and "J-87918P1": 90 km/h.

SAFETY

- Do not attempt to assemble the product in windy or wet conditions.
- Always keep plastic bags out of reach of children.
- Keep children away from the assembly area.
- Do not attempt to assemble the carport if you are tired, have taken medication, are under the influence of alcohol or if you are prone to dizzy spells.
- When using a stepladder or power tools, ensure that you follow the manufacturer's safety advice.
- Some parts have sharp metal edges. Handle the components with care, and always wear gloves during assembly.
- The product must be sealed in concrete according quality and professional standards.
- Securely fasten all screws once the product is assembled.

INSTALLATION

- Please consult your local building authorities to know if planning permission is required to erect the carport in your area.
- This product must be installed on flat, levelled ground to ensure stability and avoid risk of structural collapse.
- This product must be anchored to the ground to ensure structural stability and rigidity, and to ensure warranty coverage.
- This product must be assembled on a solid base (such as concrete or asphalt).
- During assembly place a soft surface below the parts, such as the product packaging, to avoid scratches and damage.
- **Step 3** : To assemble the "J-150975" panels, the plastic end caps must be removed.
- **Step 3** : Do not over tighten (6 Nm max).
- **Step 5** : Secure the product to the ground as follows:
 - Drill Ø8 holes into the concrete base for each of the bolt-down post support holes;
 - Hammer the "J-121374" anchor studs into the holes;
 - Fasten the anchor studs.
- Repeat steps 1 to 7 for the quantity of panels you want to mount.

MAINTENANCE

- Always use clear water or mild, PH neutral detergent solutions, to clean the carport and especially the roof panels
- RAL paint code: 7016
- The fastening of the bolts must be checked regularly.

Customer Service

- Our customer service will only replace missing and/or faulty parts and will under no circumstances replace the product in its entirety.
- Any parts found to be missing from the original packaging will be supplied free of charge, provided that the claim is made within two months of the product purchase date.
- Claims for compensation (in whatever form) will not be accepted.
- No product returns will be accepted, unless expressly requested and agreed to by us.
- Any defective products must be kept available for a period of 1 month, as we may request them to be returned for inspection purposes.
- Do not attempt to modify the original product (for example by adding an attachment). Only TRIGANO JARDIN replacement parts should be used. For any Customer Service enquiries please consult the following website: <http://sav.triganojardin.com>.

WARRANTY

For any warranty claims, please keep these assembly instructions and your proof of purchase safely.

For any problems relating to your carport, please go to our website <http://sav.triganojardin.com>.

1. Conditions:

- The warranty will cover any manufacturing defects or product malfunctioning within normal use.
- The warranty will only be valid if the product is installed, used and maintained in accordance with these assembly instructions.
- Any misuse or modification of the product other than that authorised in the assembly instructions will void all warranties.
- The warranty does not cover any damages caused by bad weather conditions (storm, hail, flood...) or any other force majeure (fire, vandalism...).

2. Exclusions


- Incorrect assembly, installation, use and/or lack of maintenance.
- Holes, micro perforations or accidental tears resulting from assembly or usage
- Failure to comply with the recommendations and instructions detailed in the assembly instructions and management letter.
- Failure to comply with the instructions for sealing the product before use.
- Any modifications to the products or deterioration resulting from adverse weather conditions (rain, snow, hail, wind).

3. Warranty period:


- The steel parts have a 2 year warranty period.




NOMENCLATURE

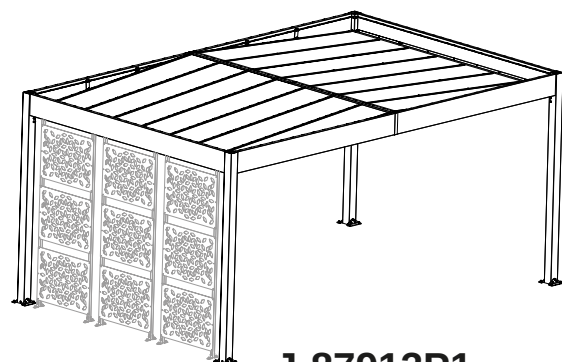


J-87913P1
LIBECCIO 3

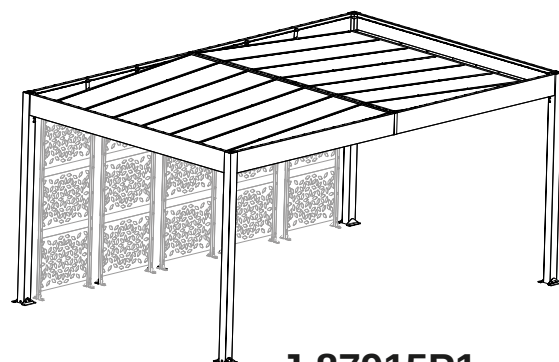

J-87915P1
LIBECCIO 5

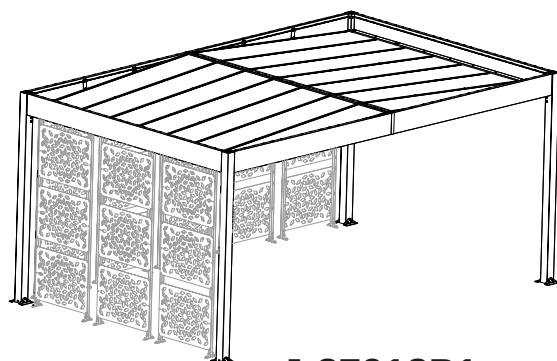

J-87918P1
LIBECCIO 8

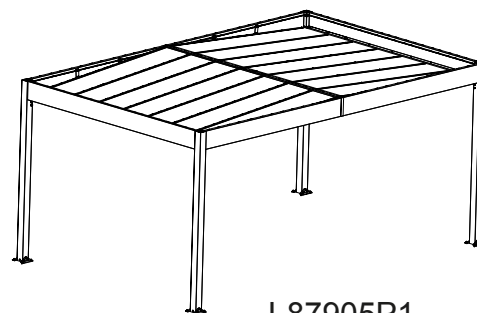


J-87905P1
LIBECCIO



x3

J-87906
CLAUSTRA CARPORT x3

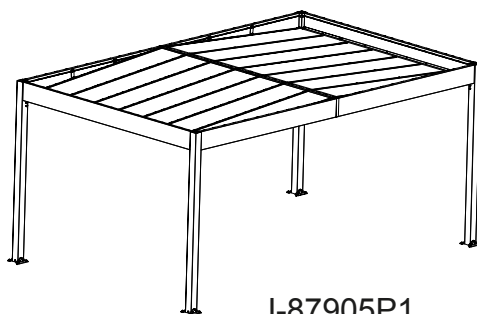


J-87905P1
LIBECCIO



x5

J-87907
CLAUSTRA CARPORT x5

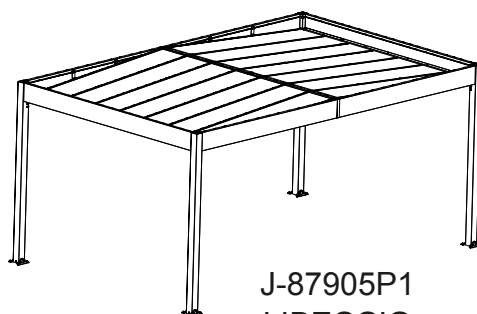

J-87905P1
LIBECCIO



x3


J-87906
CLAUSTRA
CARPORT x3



x5

J-87907
CLAUSTRA
CARPORT x5

NOMENCLATURE

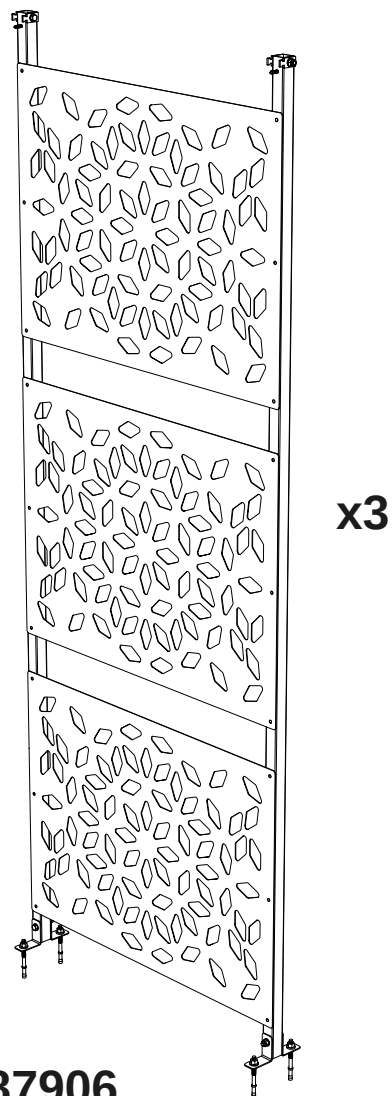

J-87906
CLAUSTRA CARPORT x3





OUTILLAGES
TOOLS




concrete
beton
Ø8



inclus
included


J-150975
x9




J-7150974
x6



J-150976
x12



J-151515
x12



J-121518 Ø8
x12



J-121525 Ø6
x54



J-121615 Ø8
x24



J-121627 Ø5
x6




J-121385 4,8x25mm
x6



J-122402



J-121670 Ø8x50mm
x12



J-121374 Ø8x95mm
x12




J-122536
x60



J-122594
x36



NOMENCLATURE

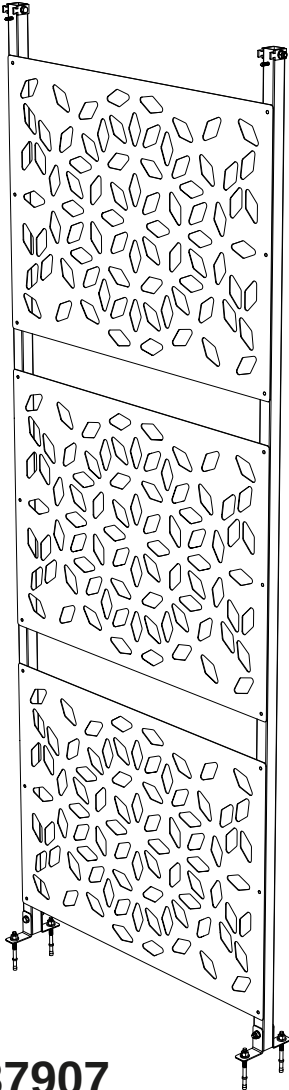

x5

J-87907
CLAUSTRA CARPORT x5





OUTILLAGES
TOOLS




concrete
beton
Ø8



inclus
included


J-150975
x15




J-7150974
x10



J-150976
x20



J-151515
x20



J-121518 Ø8
x20



J-121525 Ø6
x90



J-121615 Ø8
x40



J-121627 Ø5
x10




J-121385 4,8x25mm
x10



J-122402



J-121670 Ø8x50mm
x20



J-121374 Ø8x95mm
x20




J-122536
x100




J-122594
x60




FONDATIONS

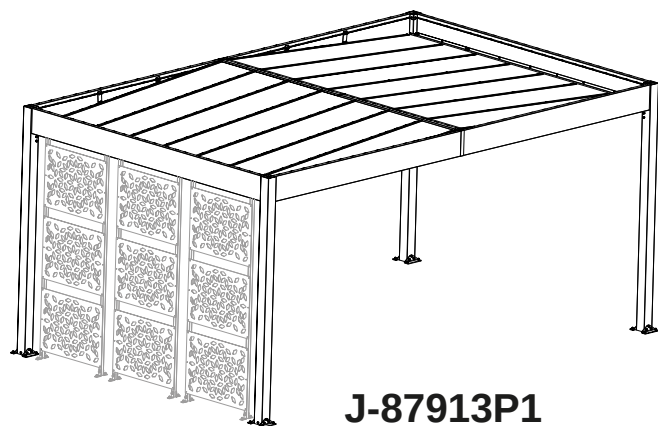



**J-87913P1
LIBECCIO 3**

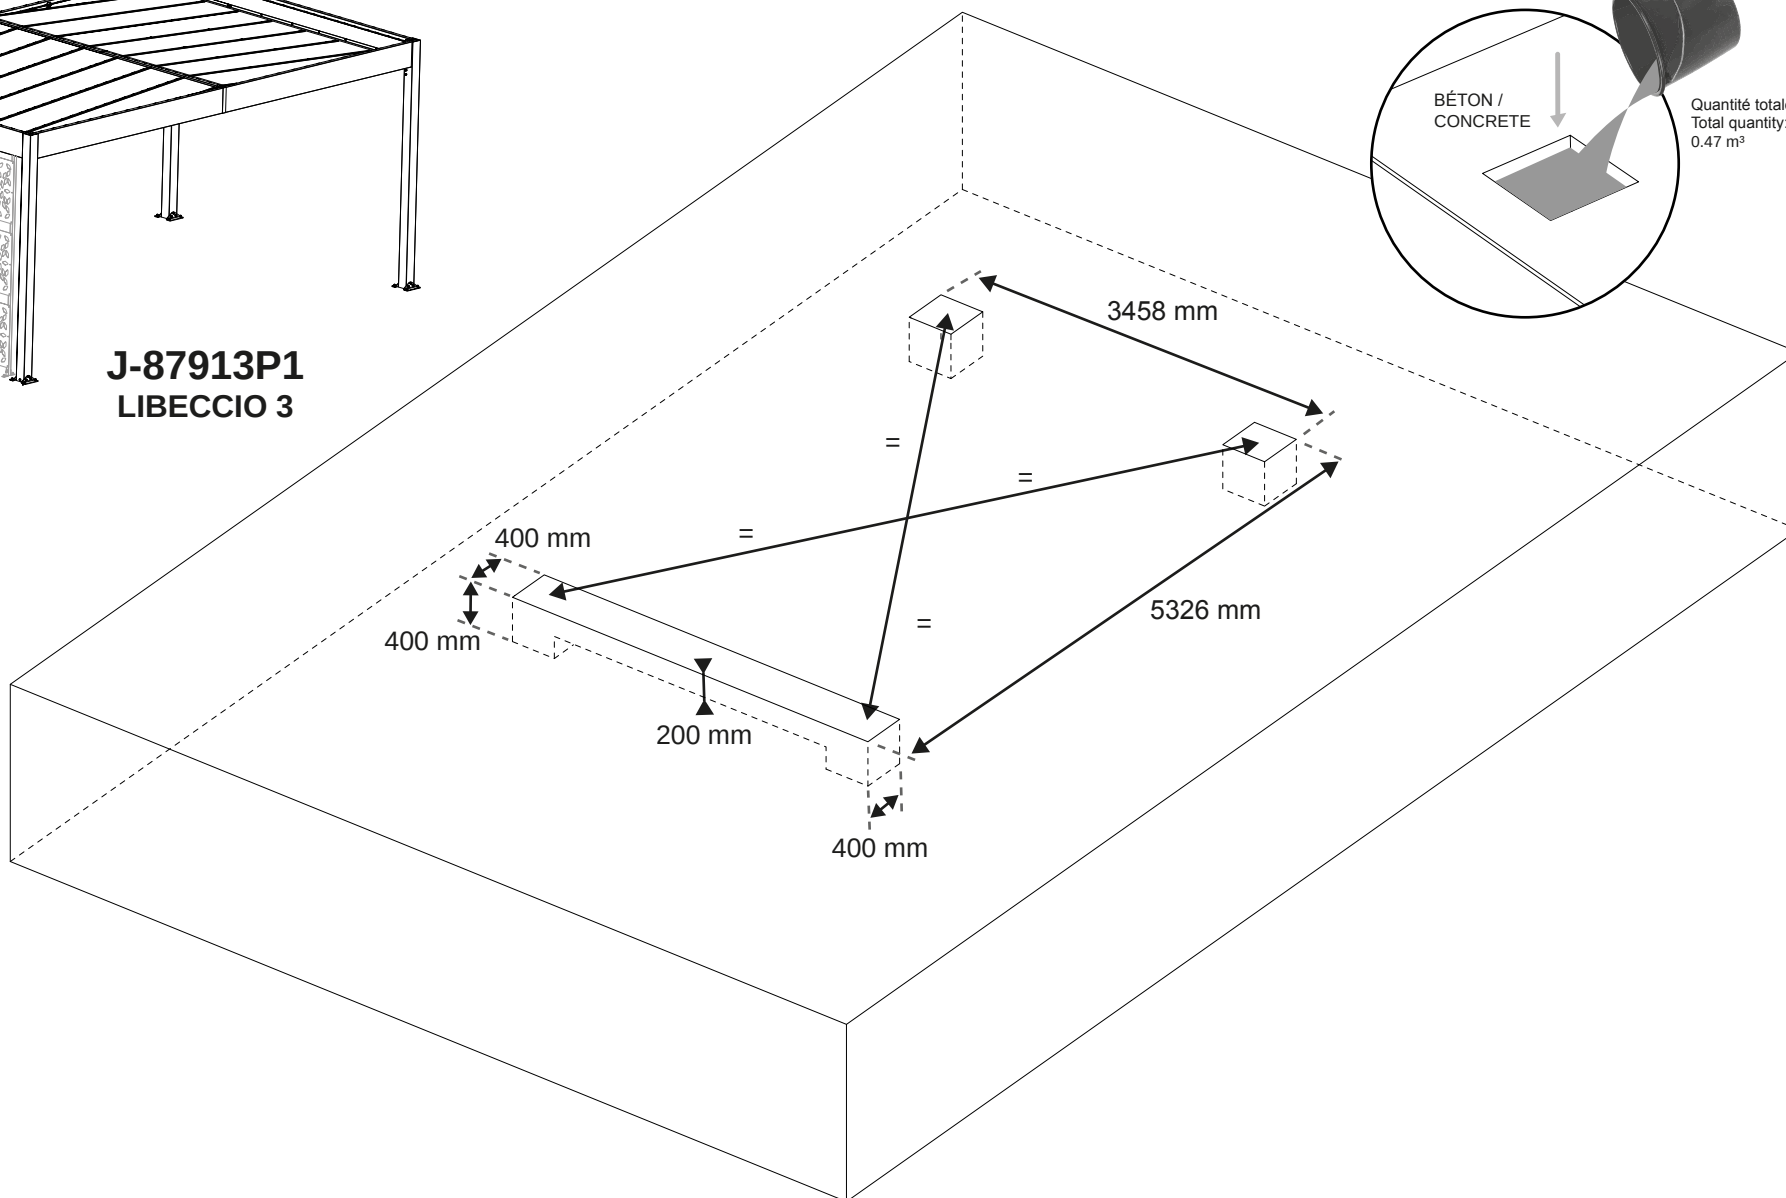

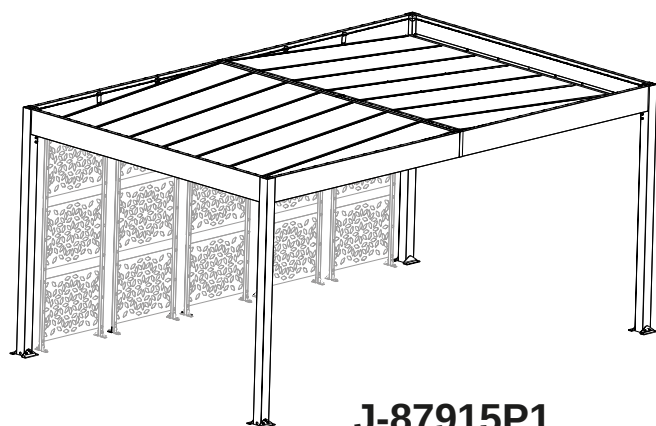


**J-87915P1
LIBECCIO 5**

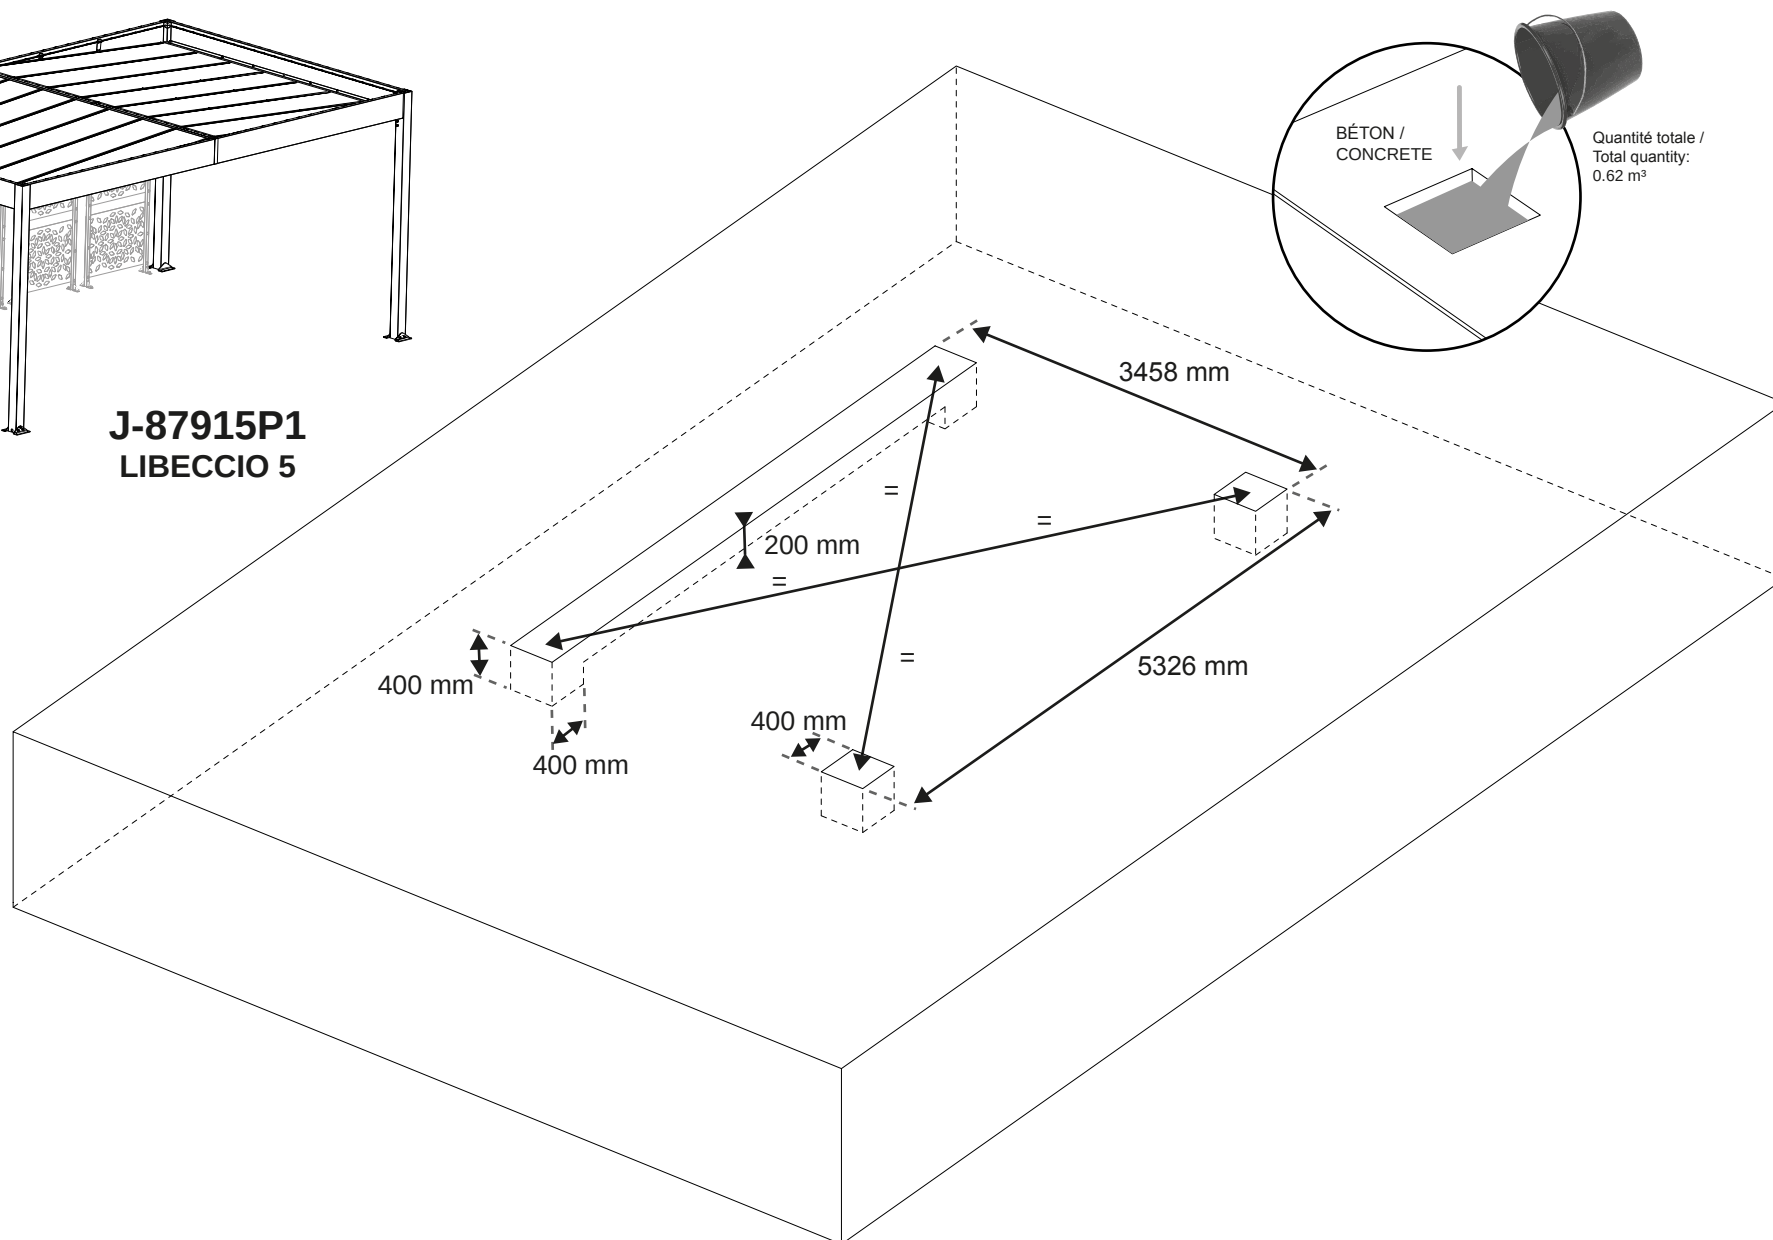

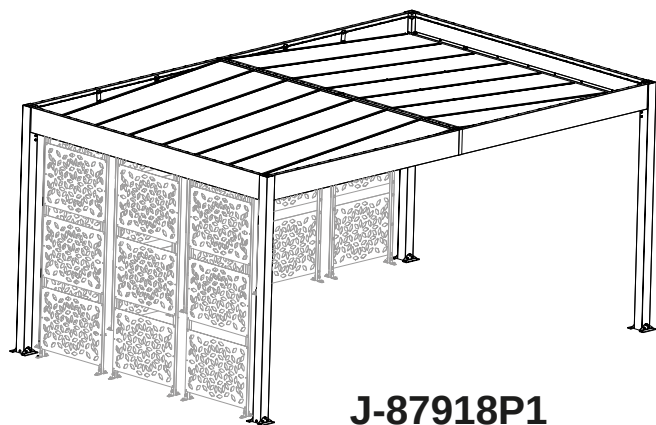


J-87918P1
LIBECCIO 8

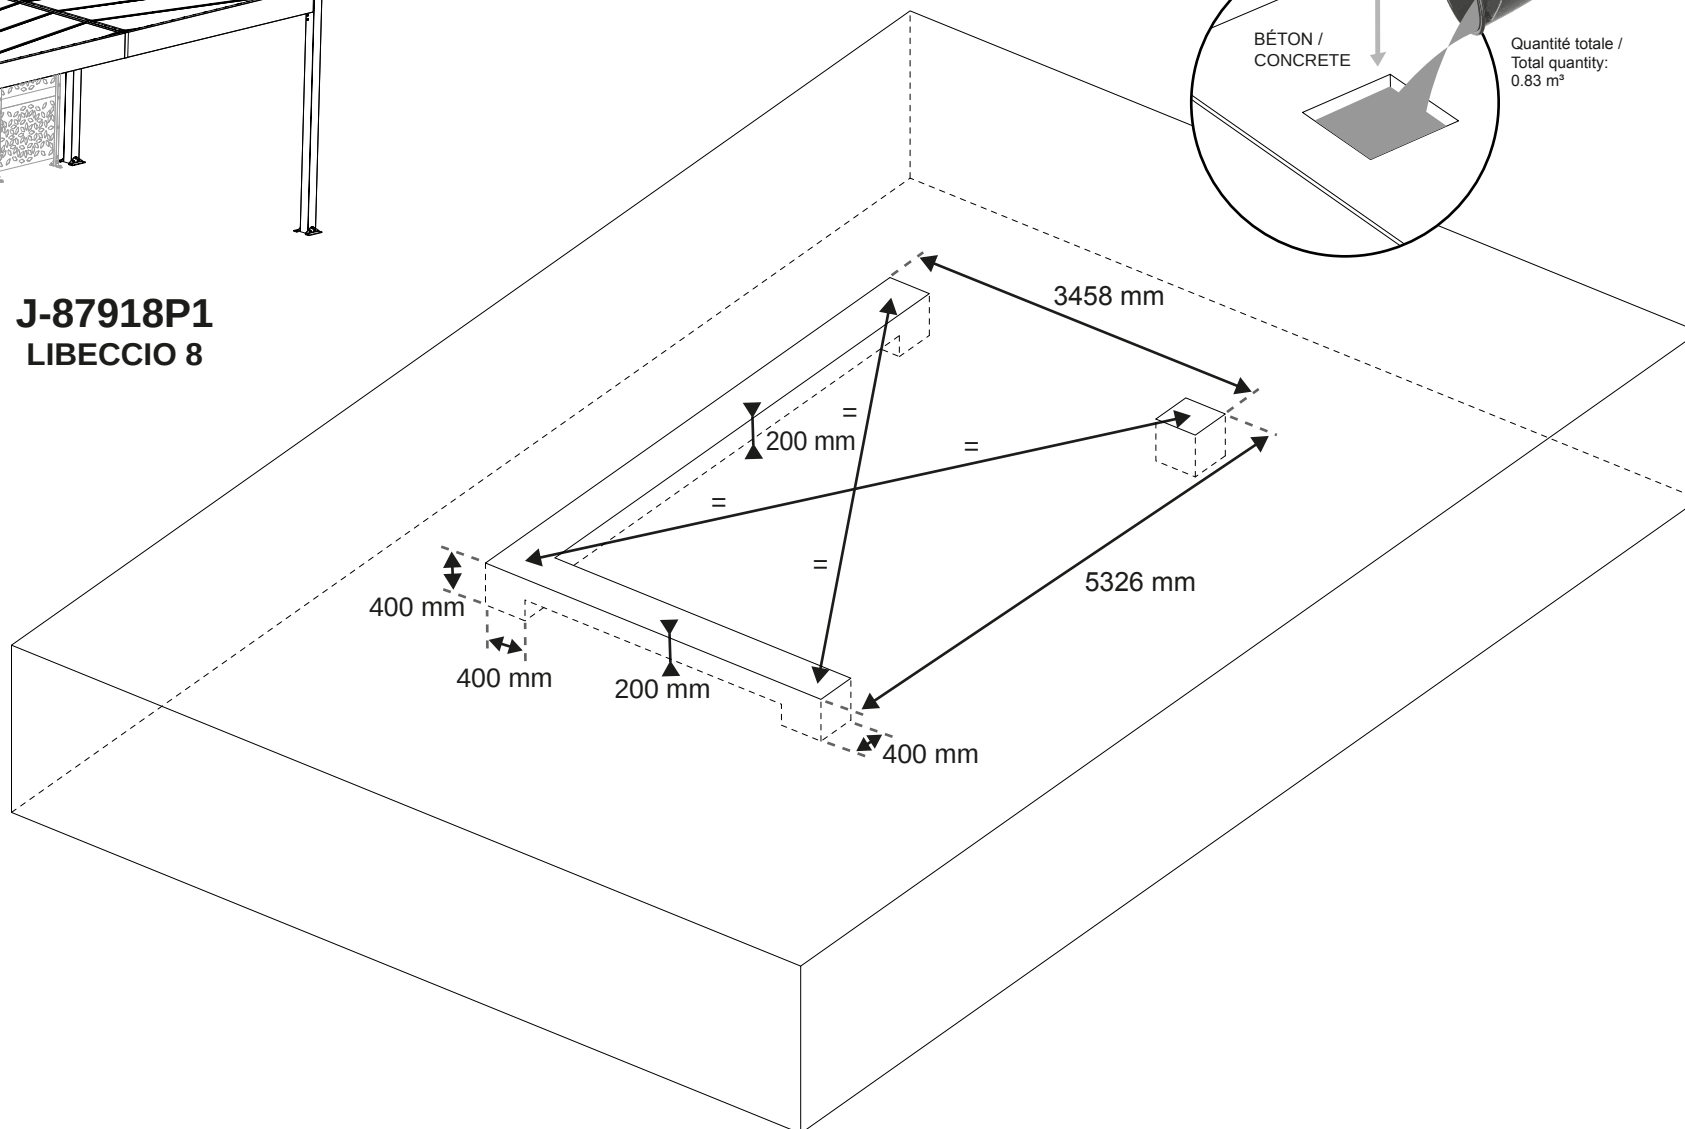


1

J-151515


Carport LIBECCIO J-87905P1




x4





1

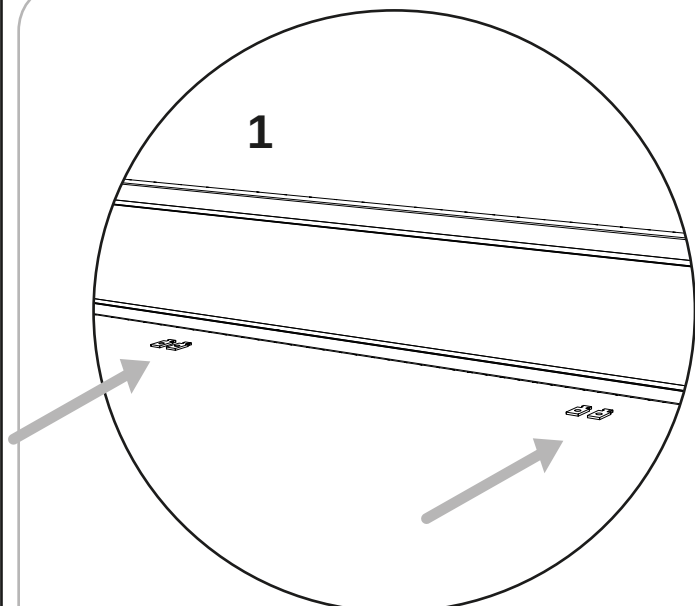

2

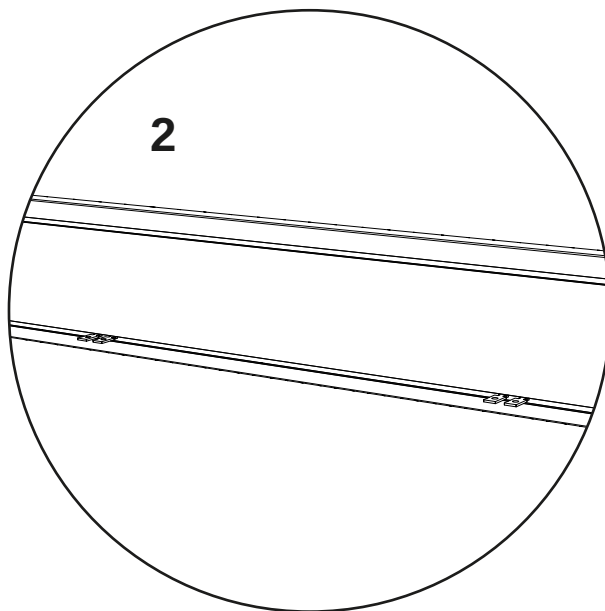

3

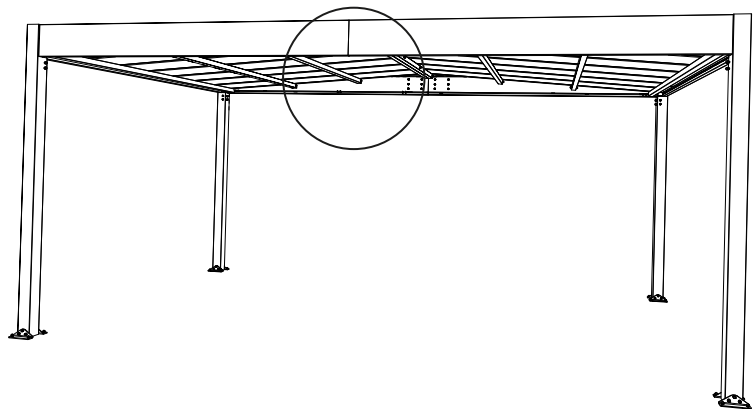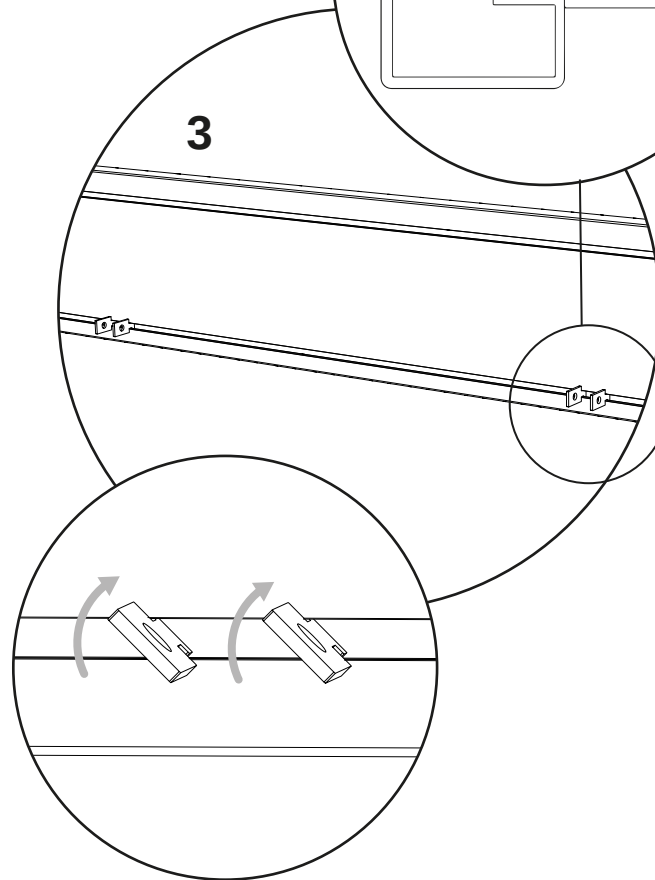

2

J-121518




x2

J-121615



x4

J-121670







x2

J-7150974



x2

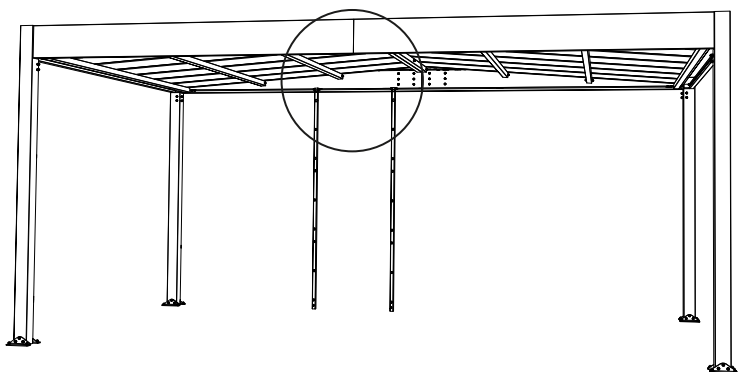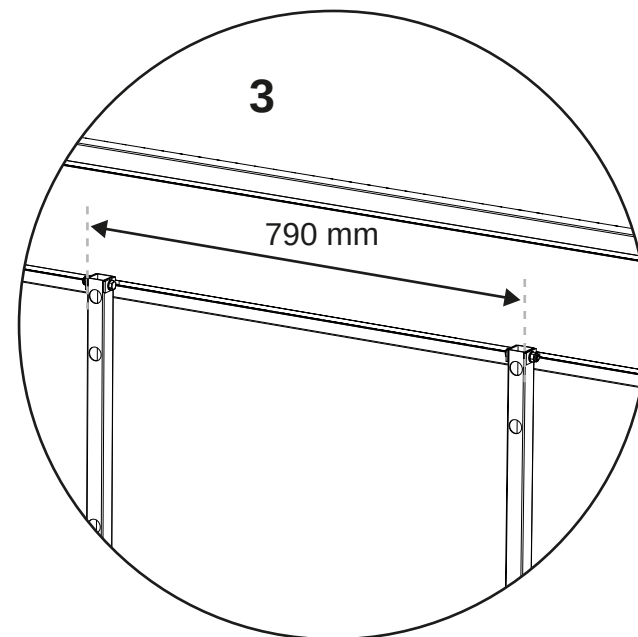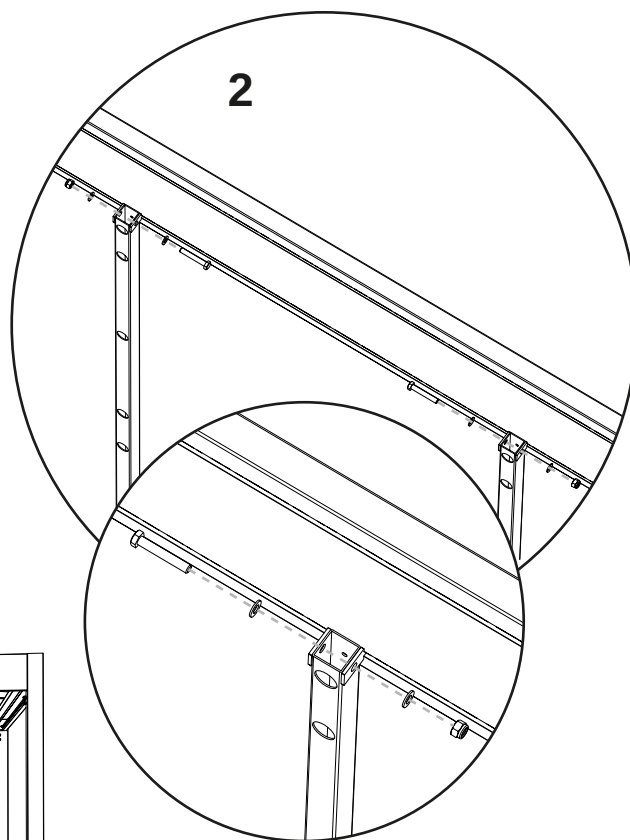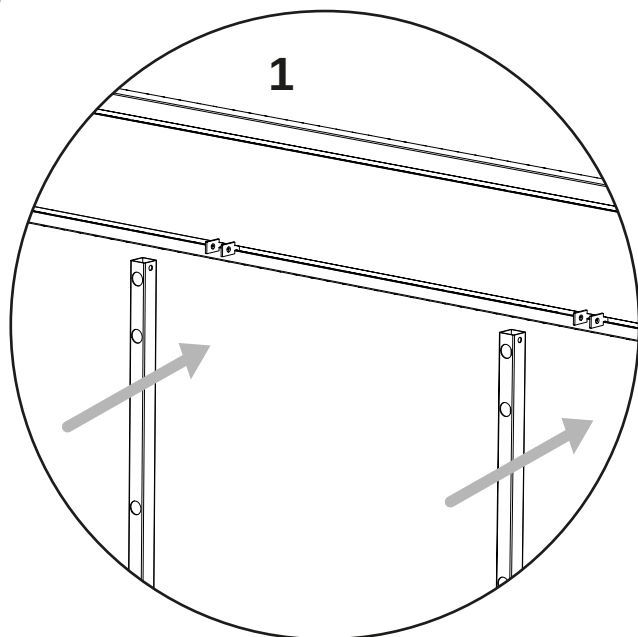


3

J-121525

J-150975




x18




x3

1

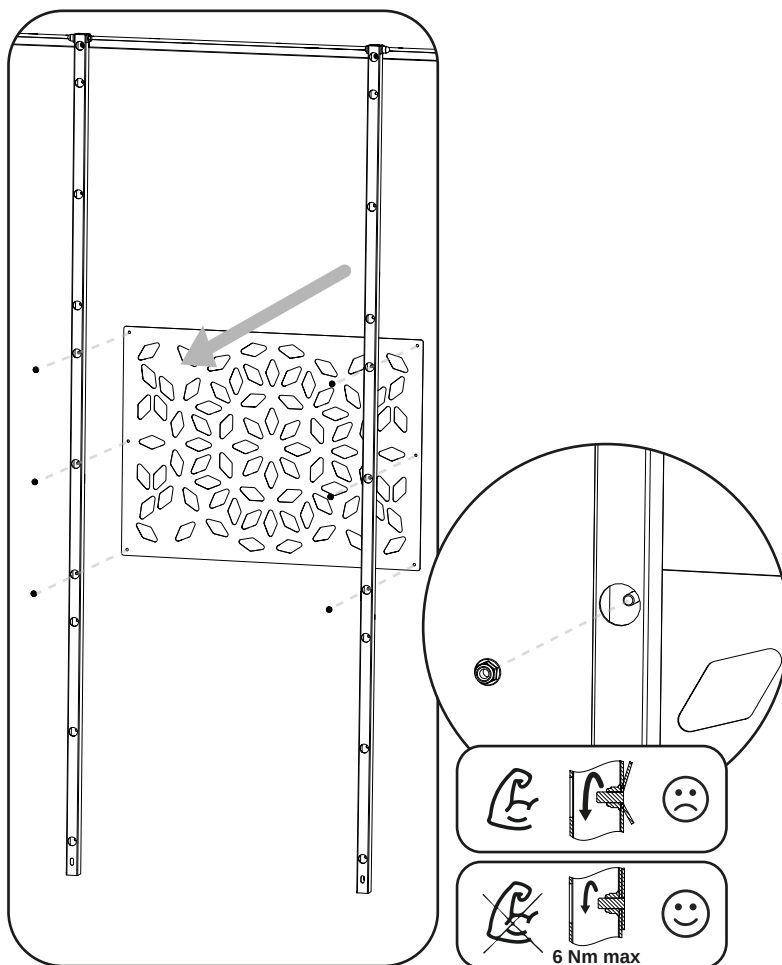

2

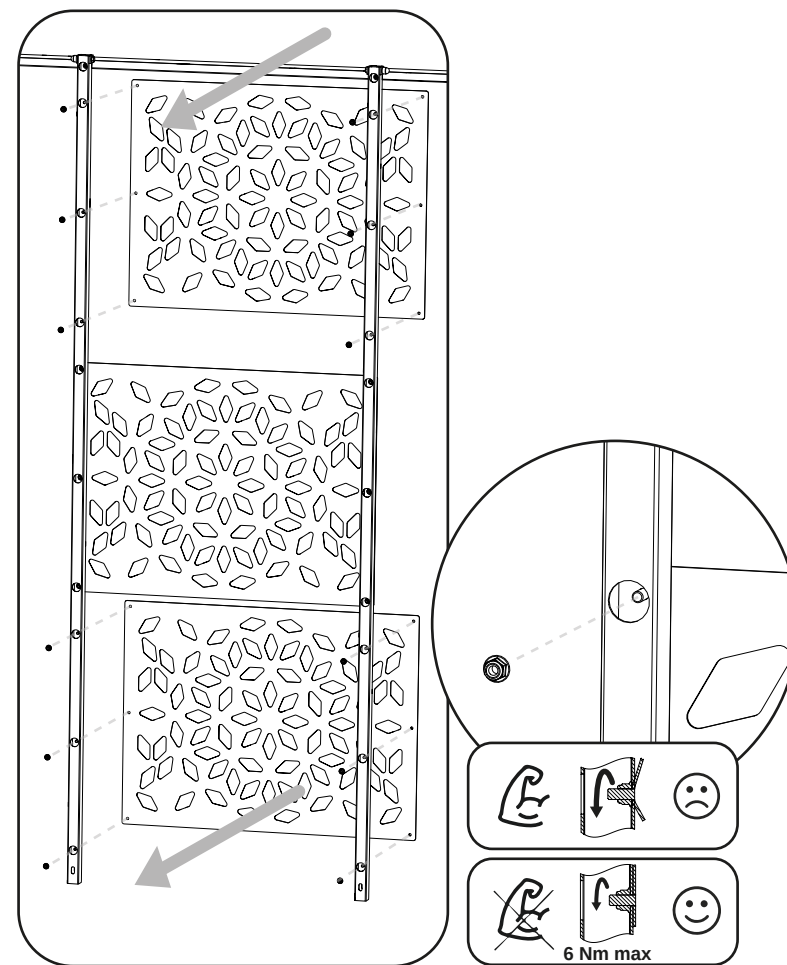

4

J-121518




x2

J-121615




x4

J-121670



x2

J-150976



x4

1

2

5

J-121374





x4


FR : Foret Ø8 béton non fourni / EN : Ø8 concrete drill bit not supplied




1

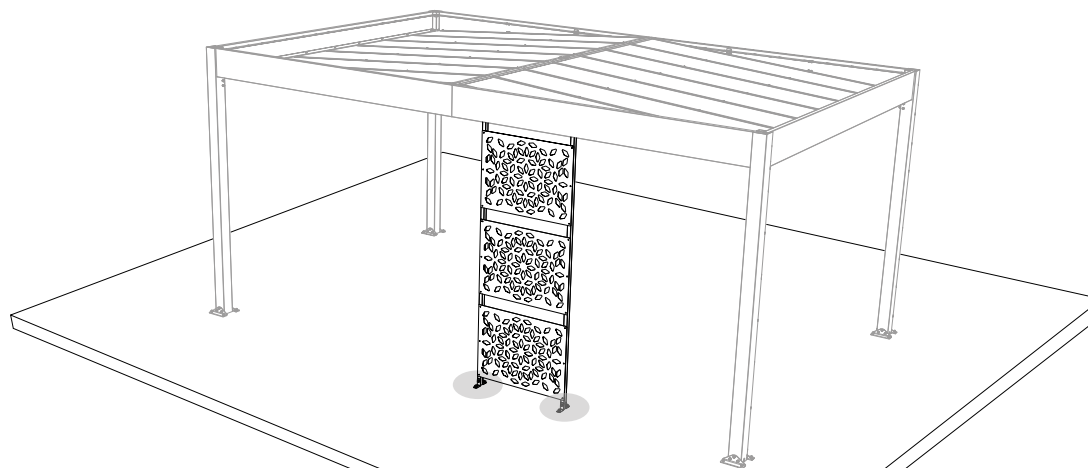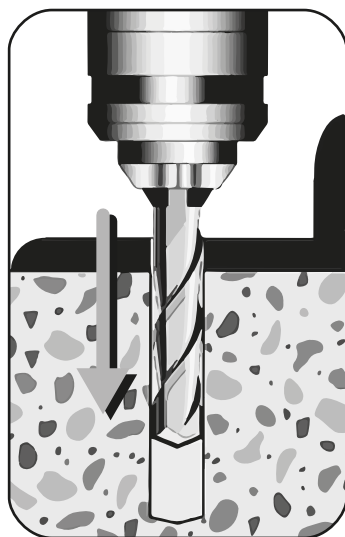

2

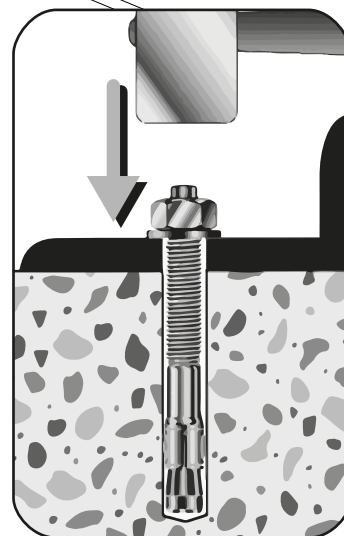

3

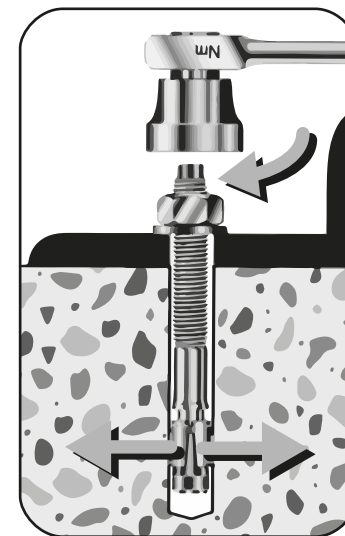

6

J-121627



J-121385



x2



x2

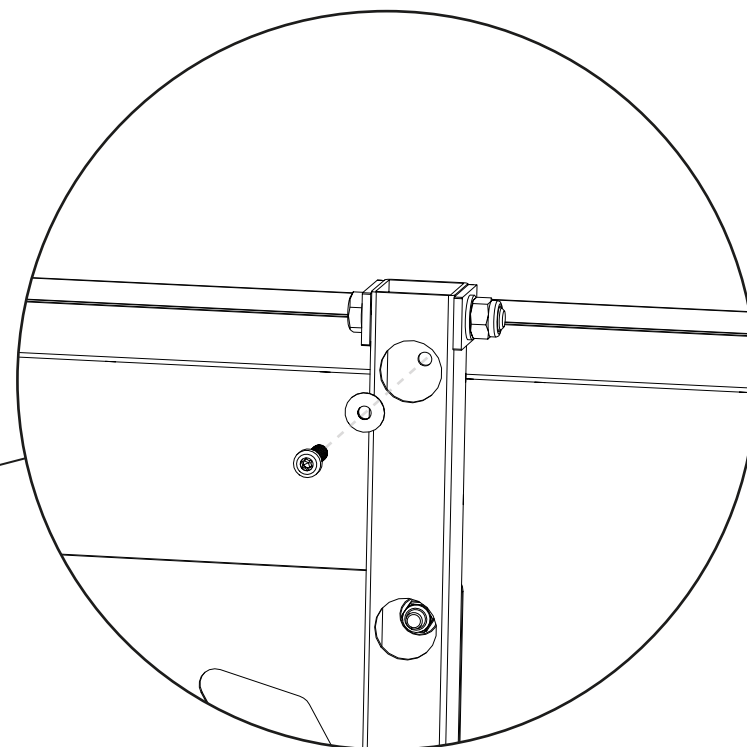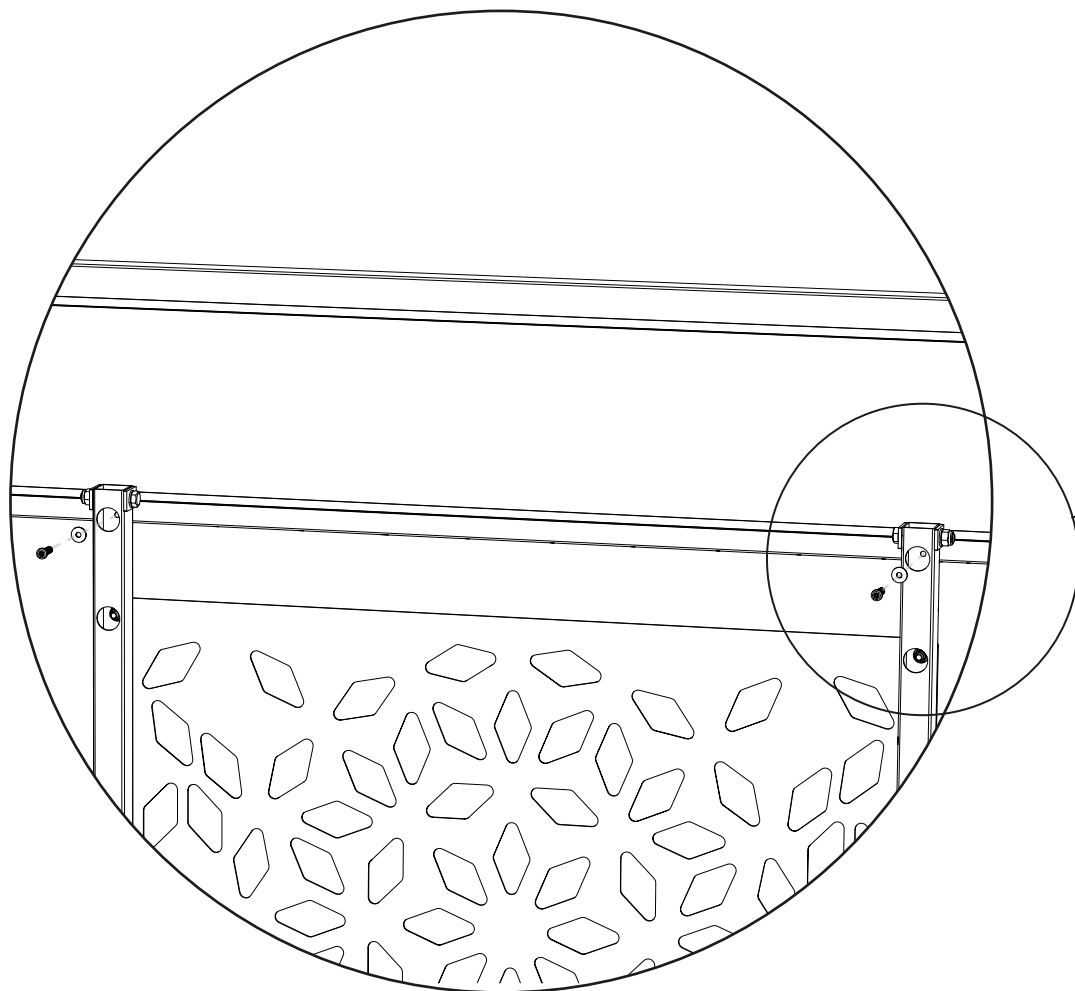

7

J-122536



x20

J-122594



x12

